



Multimode CATV Transport

- Able to transmit up to 5 CATV channels over one multimode fiber.
- Supports transmission of sub-band, low-band, FM, mid-band, and high-band channels, adding flexibility to the system.
- Plug-and-play design assures easy installation.
- The most comprehensive product of its type available in the industry.
- Ideal for small corporate TV video distribution, campus media retrieval systems, teleconferencing applications, or as a return path transmitter for larger video systems.

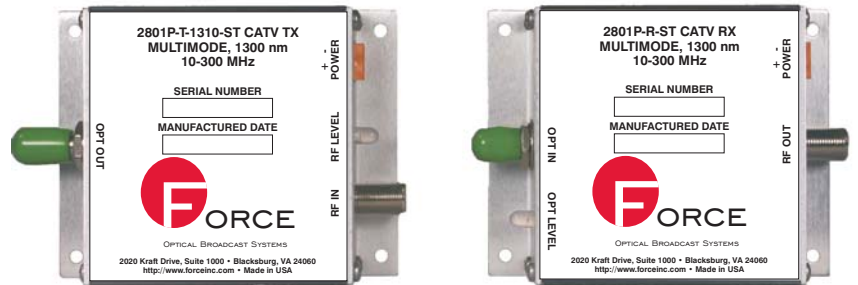

Model 2801 PRO: Stand-alone Transmitter and Receiver

The Model 2801 PRO 5 Channel CATV VSB/AM video link provides a high-quality system for transferring five video channels per multimode fiber with complete EMI immunity. The use of state-of-the-art 1300 nm LEDs and PIN detectors allows Model 2801 PRO to operate at exceptional performance levels. The unit offers excellent analog bandwidth that ranges from 5 to 350 MHz, allowing transmission of all sub-band, low-band, FM, mid-band, and high-band channels. This system also offers excellent performance at lower channel loadings. The Model 2801 PRO provides an inexpensive option for transmitting high-quality video, making it an obvious choice for video delivery services using multimode fiber.

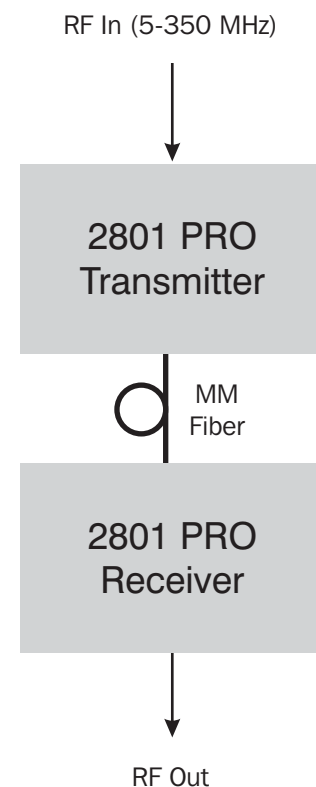


Information contained herein is deemed to be reliable and accurate as of issue date. EMCORE reserves the right to change the design or specifications of the product at any time without notice. Ortel, the Ortel logo, EMCORE, and the EMCORE logo are trademarks of EMCORE Corporation.

Specifications and Ordering Information

Optical Characteristics*

	Min	Typ	Max	Units
Operating Wavelength	1290	1300	1330	nm
Lower Bandwidth		2	5	Mhz
Upper Bandwidth	350	400		Mhz
Optical Output Power	-8.0	-7.0	-6.0	dBm
Optical Loss Range	0		9	dB
Impedance		75		ohms
Carrier-to-Noise Ratio	See Graph Below			

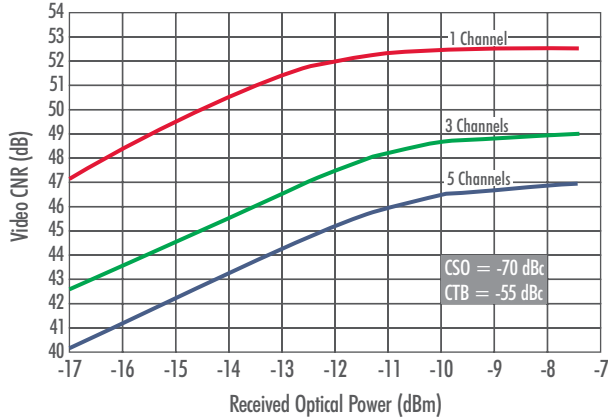

Electrical Characteristics*


	Min	Typ	Max	Units
Power Supply Voltage (Tx)	+9.0		+11.0	VDC
Power Supply Voltage (Rx)	+9.0		+11.0	VDC
Power Supply Current (Tx)		250	270	mA
Power Supply Current (Rx)		100	110	mA

Physical Characteristics*

	Min	Typ	Max	Units
Weight		6 170		oz. g
Physical Dimensions	3.75 x 2.95 x 1.12 95 x 75 x 29			in. mm

Environmental Characteristics*

	Min	Typ	Max	Units
Operating Temp. Range	+10		+45	°C
Storage Temp. Range	-20		+70	°C
Relative Humidity	10		95	%

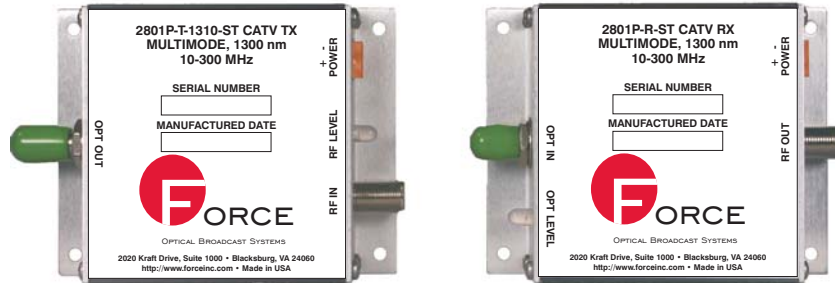

Model 2801 PRO Transmitter & Receiver

MM 5 Channel Tx and Rx P/N

2801 PRO Tx and Rx Options	5 Channels
Std.-alone Tx, , 1300 nm, ST	2801P-T-1310-ST
Std.-alone Rx, 1300 nm, ST	2801P-R-ST

*System performance specifications indicated for use with 62.5/125 μ m multimode fiber.
See IOM2801 PRO for complete performance specifications.
Contact an Applications Engineer or visit our website for complete specifications on rack-mounting and power supply options.

Rack and P.S. P/N

Accessory Options	Rack Accessories	Power Supplies
Tx Stand-alone P.S. + 9 Volts DC		PS090-1
Rx Stand-alone P.S. + 9 Volts DC		PS090-1
3RU Rack Chassis 3RU Adapter Card	3000CB-NN 3000A-NN-1	
3RU P.S., Universal AC 3RU P.S., -48 Volts DC		3000UA-NN 3000UC-NN

Information contained herein is deemed to be reliable and accurate as of issue date. EMCORE reserves the right to change the design or specifications of the product at any time without notice. Ortel, the Ortel logo, EMCORE, and the EMCORE logo are trademarks of EMCORE Corporation.

2020 Kraft Drive, Suite 1000, Blacksburg, VA 24060
USA (800) 732-5252 • TEL (540) 961-1945 • FAX (540) 961-1900
www.forceinc.com • www.emcore.com



© Copyright 2007. EMCORE Corporation